


PART NO.	VOLTS	AMPS
CB129-10	6-12	10
CB129-15	6-12	15
CB129-20	6-12	20
CB129-25	6-12	25
CB129-30	6-12	30
CB129-40	6-12	40
CB129-50	6-12	50

TYPE 2 CIRCUIT BREAKER

COMPLIES WITH SAE STANDARD J553

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	ISSUED	01/31/2005	D.C.
2	REVISED PART NO. CHART	12/07/2006	D.C.
3	TYPE 2 AND SAE NOTES, ADD 50AMP	08/04/2008	D.C.
4	REVISED VOLTAGE RATING	06/27/2013	D.C.

*Two 10-32 Stud Terminals

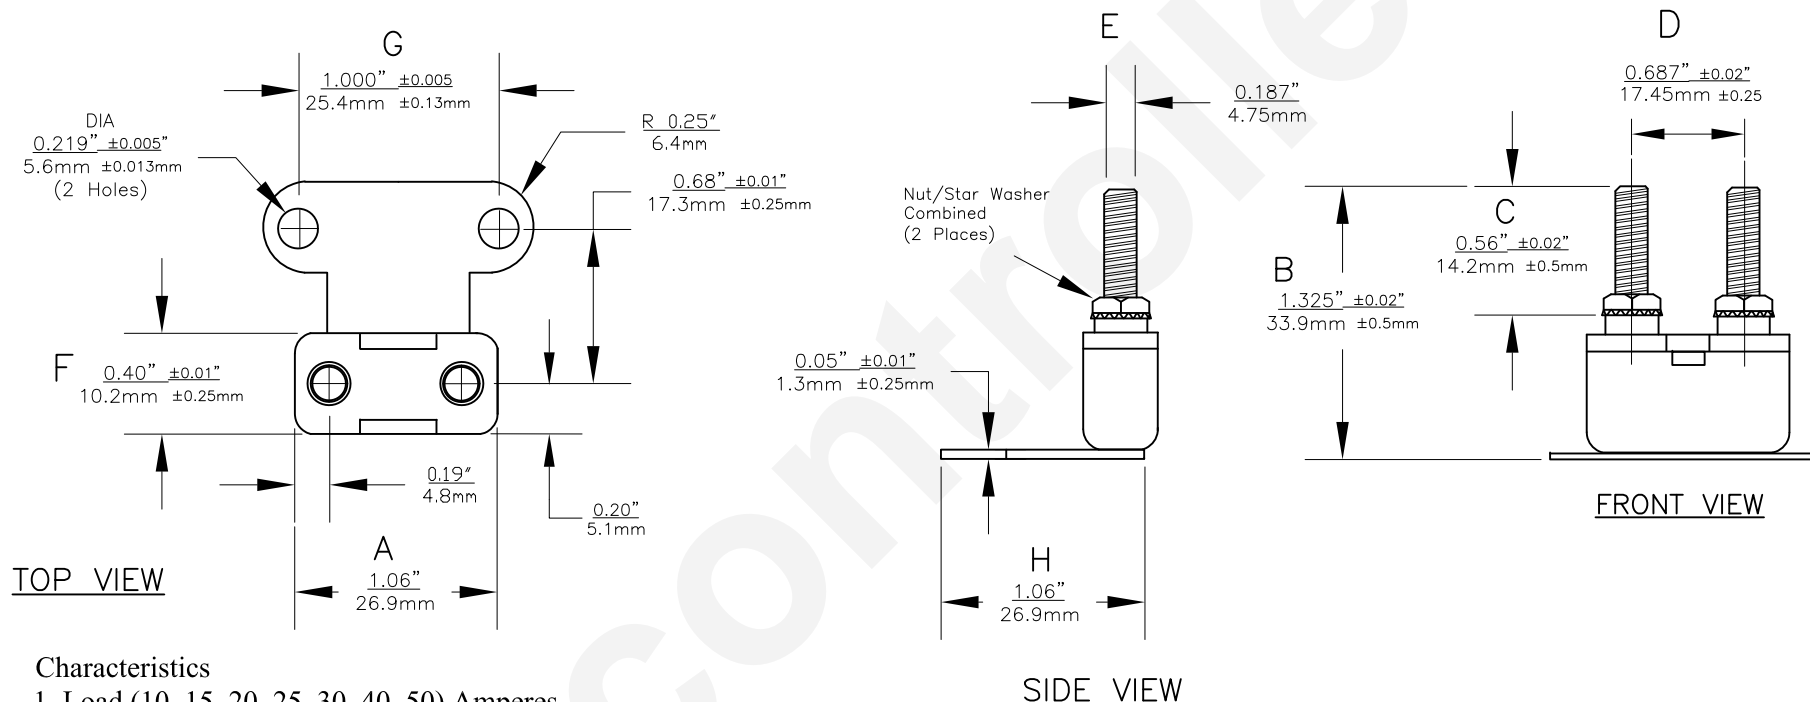

Characteristics

- Load (10, 15, 20, 25, 30, 40, 50) Amperes
- Voltage 6-12 Volts.
- Voltage Drop is less than 150 MV at Rated Current
- Open Circuit Current: 1.0-Ampere Maximum.
- Operation:
 - Will not open. No Load at 240° F (116° C)
 - Time to Open @ 135% Rated Current: 30 Minutes Maximum.
 - Time to Open @ 200% Rated Current: 60 Seconds Maximum.
 - Hold 100% rated current continuously for a minimum of 30 minutes.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES				CEC INDUSTRIES LTD	
DECIMALS	ANGULAR	599 BOND STREET		LINCOLNSHIRE IL 60069	
.XX \pm .05	\pm 0.5°	TITLE			
.XXX \pm .010	\pm 1/64	CIRCUIT BREAKER NO. CB129			
FRACTIONAL		SIZE	FSCM NO.	DWG NO.	REV
		A	9305RSL FCB	CB129	4
DRAWN	DATE	SCALE	PLOT SCALE		SHEET 1 OF 1
D. C.	01/31/2005				
CHECKED		FILE CB129.dwg		DO NOT SCALE DRAWING	
DESIGN					
MATERIAL					